


1/2" COMPOSITE IMPACT WRENCH | NS.1800F2

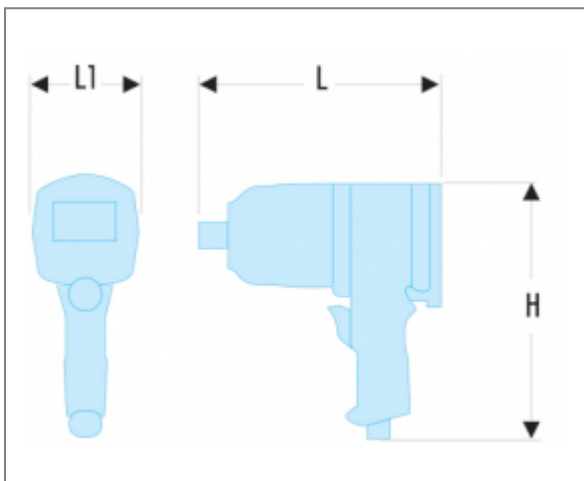

Description

- Durable twin hammer mechanism encased in a strong aluminium housing.
- 6 vane motor delivering 1,080 N.m of torque.
- One switch integrating power regulation and forward reverse.
- Insulating and lightweight durable composite housing.
- Feather teasing trigger for optimal speed regulation.
- Specific short design to get into confined spaces.
- Socket ring retainer for safety.
- Breakaway torque 1080 N.m.
- Breakaway torque 950 N.m.
- Blows per minute 1060 cpm.
- Free speed 7700 tr/min.
- Square drive 1/2".
- Working pressure 6,2 bar.
- Average air consumption 143 l/min.
- Air inlet 1/4".
- Minimum hose diameter 10 mm - 3/8".
- Vibration 10,20 m/s²/a.
- Vibration 1,45 m/s²/K.
- Sound pressure 96 dB(A).
- Sound power 107 dB(A).

Information

H [mm]	183
L [mm]	180
L1 [mm]	69
[kg]	2,200