

Explosion Proof Diaphragm Switch

D1X, D2X Series

Features

- ▶ Hermetically sealed
- ▶ Explosion proof housing for hazardous location
- ▶ Tamper proof setpoint adjustment
- ▶ Ideal for pressure or vacuum
- ▶ UL, CSA, ATEX approved
- ▶ NEMA 4, 7, 9 & IP66

Applications

- ▶ Pump & compressor monitoring
- ▶ Hydraulic power units
- ▶ Oil & gas
- ▶ Food & beverage
- ▶ Utility & power generation
- ▶ Mining

General Specifications*

Accuracy:	± 0.5% of the adjustable range
Switch: Type: Rating:	Single pole double throw (SPDT) Snap Action; single circuit 10 amps @ 125/250 VAC; 3 amps @ 480 VAC (Class A or H limit switch). Consult sales drawing for ratings of optional limit switches.
Wetted Parts: Process Fitting: Diaphragm: Enclosure:	303 stainless steel 17-7 PH stainless steel Die-cast aluminum, anodized and painted
Electrical Connection:	Screw terminals on covered terminal strip via 1/2" NPT (D1X) and 3/4" NPT (D2X) conduit connection.
Enclosure Ratings:	NEMA 4, 7, 9
Pressure Connection:	1/4" NPT Female
Approvals: UL (standard):	All models are UL approved for use in hazardous locations Class I, Groups B, C, & D; Class II, Groups E, F, & G. UL File No. E37043




Approvals (cont.): CSA (standard): ATEX (optional):	All models are CSA approved for use in hazardous locations Class I, Groups B, C & D; Class II, Groups E, F, & G. CSA File No. LR22354 EX models are ATEX marked as follows: CE 0081, ISSeP 08 ATEX024X II 2G D, Ex d IIC T6 Ex tD A21 IP66 T80°C -40°C ≤ Tamb ≤ +75°C
Temperature Range: Operating: Storage:	-40° to +165°F (-40° to +74°C) -65° to +200°F (-54° to 93°C)
Adjustment Instructions: Pressure: Vacuum:	Turn adjustment screw counterclockwise to raise actuation point. Turn adjustment screw clockwise to increase setpoint (higher vacuum).
Options:	Factory pre-set
Shipping Weight:	Single - approximate 5.0 lbs. Double - approximate 5.5

* See product configurator for additional options.

Wiring Code

Lead	Circuit #1		Circuit #2	
	Pressure	Vacuum	Pressure	Vacuum
Normally Closed	Blue	Red	Orange	Yellow
Common	Purple	Purple	Brown	Brown
Normally Open	Red	Blue	Yellow	Orange


Wiring Diagram

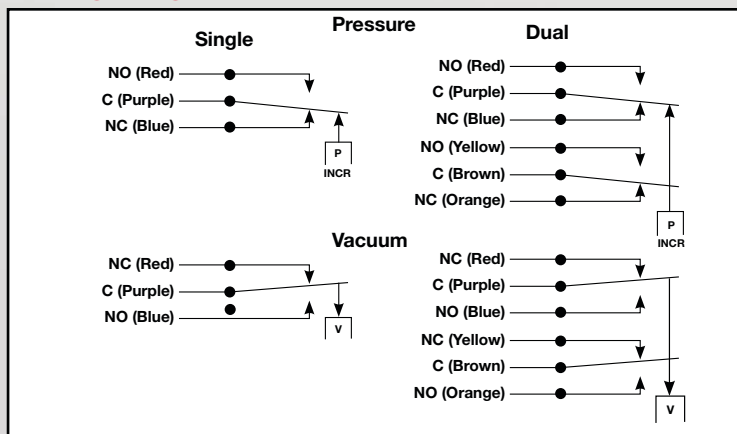

Explosion Proof Diaphragm Switch

D1X, D2X Series

Technical Drawing

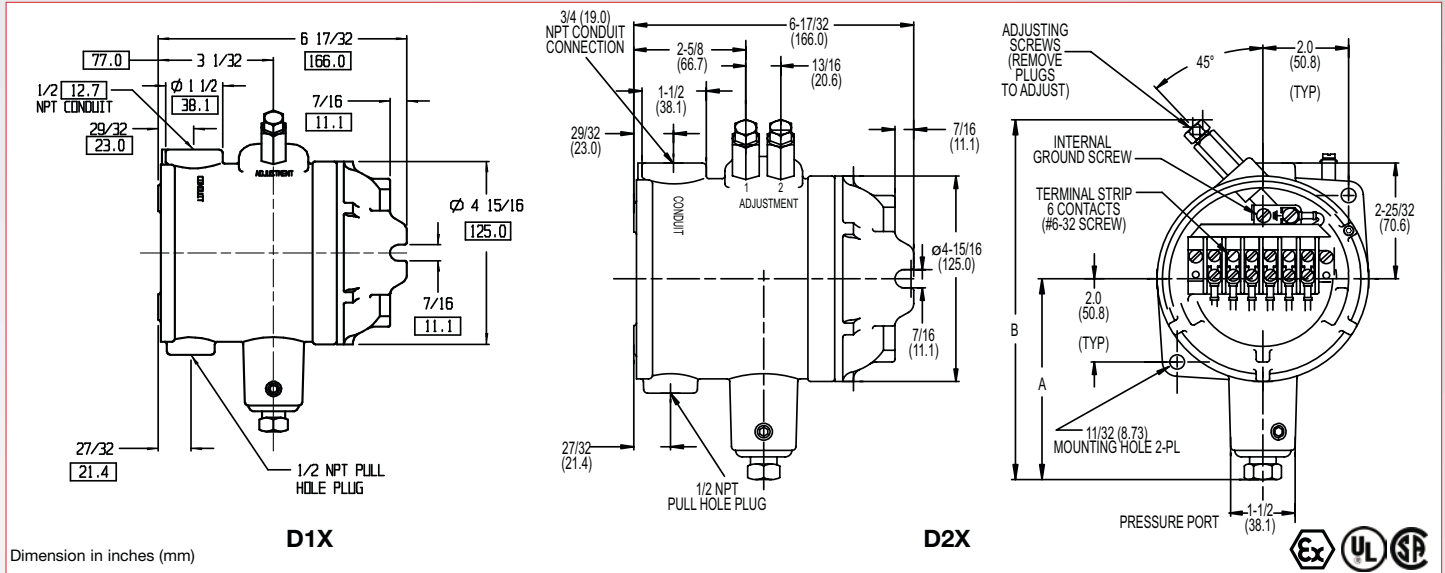

Product Configurator

Example	D1X	-A	3SS	-P2	-UL
---------	-----	----	-----	-----	-----

H Hermetically sealed limit switch option - Class I, Division II (requires AA, CC or HH limit switch)

Base Configuration

D1X	Single setpoint housed version
D2X	Dual setpoint housed version

Limit Switch¹

-A	10 amps @ 125/250 VAC; 3 amps @ 480 VAC; (standard for pressure range 3SS, 80SS or 150SS)
-H	10 amps @ 125/250 VAC; 3 amps @ 480 VAC; (standard for pressure range 18SS)
-J	10 amps @ 125/250 VAC; 3 amps @ 480 VAC; (comes with an elastomer boot)
-M	10 amps @ 125/250 VAC; 3 amps @ 480 VAC; 0.5 amps @ 125 VDC; 0.25 amps @ 250 VDC
-GH	1 amp @ 125 VAC; 1 amp @ 24 VDC with Gold Contacts
-AA	Hermetically sealed; 4 amps @ 125/250 VAC (not available on vacuum models)
-CC	Hermetically sealed; 10 amps @ 125/250 VAC (not available on vacuum models)
-HH	Hermetically sealed; 5 amps @ 125/250 VAC (not available on vacuum models)

Options

-UL	UL & CSA Approval
-EX	ATEX Certified, -EX in place of UL for ATEX only
-Sxxx	Factory pre-set (consult factory)

Pressure Connection

Blank	1/4" NPT female pressure connection (standard)
-P2	1/2" NPT female pressure connection

Adjustable Pressure Range

	Adjustable Range (PRESSURE)				Approx. Deadband ² (Actuation Value) psi-(bar)	Proof Pressure psi (bar)
	Decreasing - psi (bar)		Increasing - psi (bar)			
	Min	Max	Min	Max		
3SS	.03 (.00)	2.85 (.2)	.18 (.01)	3 (.2)	.07 - .15 (0 - .01)	10 (.7)
18SS	.4 (.03)	17.74 (1.2)	.66 (.04)	18 (1.2)	.12 - .26 (.01 - .02)	60 (4.1)
80SS	.5 (.03)	76.6 (5.2)	3.9 (.3)	80 (5.4)	1.6 - 3.4 (.1 - .2)	160 (10.9)
150SS	1.5 (.10)	144 (9.8)	7.5 (.5)	150 (10.2)	2.3 - 6.0 (.2 - .4)	300 (20.4)

	Adjustable Range (VACUUM)				Approx. Deadband ² (Actuation Value) In. Hg	Proof Pressure In. Hg
	Decreasing - In. Hg		Increasing - In. Hg			
	Min	Max	Min	Max		
3SS	0.06	5.72	0.34	6	.14 - .28	6
18SS	0.8	29.2	1.6	30	.4 - .8	30

NOTES:

¹ Consult Supplemental Guide for specific deadband values

² Deadband values indicated when used with the "standard" limit switch

Barksdale
CONTROL PRODUCTS